(54) Title: METHOD AND APPARATUS FOR THE RAPID ACQUISITION OF DATA IN COHERENCE SCANNING INTERFEROMETRY

(57) Abstract

A method of profiling a rough surface of an object includes the steps of producing an interference pattern of the object surface (14) using an interferometer (1) to produce an illumination intensity on the pixels of an imaging device (18), varying the optical path difference between the object surface (14) and a reference surface (22) of the interferometer (1) through a range including a position of zero optical path difference for each pixel, calculating values of an interference discriminator function to identify the regions of coherence, gathering at the imaging device (18) and storing for each pixel a plurality of intensity values about the region of coherence - as identified by the state or value of the interference discriminator function calculations - at consecutive data points spaced along the range by a predetermined phase difference, storing for each pixel the relative position of the plurality of intensity values along the range, and calculating from the stored intensity values the difference in height between two selected pixels using methods known in the art. An apparatus for practising the invention is also disclosed.

METHOD AND APPARATUS FOR THE RAPID ACQUISITION
OF DATA IN COHERENCE SCANNING INTERFEROMETRY

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

FIELD OF THE INVENTION

The present invention relates to precision optical metrology instrumentation and, more particularly, to methods and apparatus for the rapid acquisition of data in coherence scanning profilometry.

BACKGROUND OF THE INVENTION

Interferometric measurements using phase shifting techniques are presently capable of subnanometer resolution. A number of currently-available products are utilizing this technology to provide fast, non-contact, and highly repeatable profiles of object surfaces and topological features. See, for example, J.F. Biegen et al., "High-Resolution Phase-Measuring Laser Interferometric Microscope For Engineering Surface Metrology", 1 Surface Topography 469 (1988). It is well known, however, that because of phase ambiguities, surface features with relative height displacements or discontinuities that exceed $\pm\lambda/4$ between adjacent measurement sites are only determinable to a resolution of modulo $\lambda/2$, where λ is the average wavelength of the illumination source.

A number of methods have been proposed and implemented to overcome this limitation in the topological profiling of such so-called rough surfaces. Among these are multiwavelength methods

-2-

such as described by K. Creath, "Step Height Measurement Using Two-Wavelength Phase-Shifting Interferometry", 26 Appl. Opt. 2810 (1987), and by Y.Y. Cheng and J.C. Wyant, "Two-Wavelength Phase-Shifting Interferometry", 24 Appl. Opt. 804 (1985), coherence scanning methods such as described by G.S. Kino and S.S.C. Chim, "Mirau Correlation Microscope", 29 Appl. Opt. 3775 (1990), and by B.S. Lee and T.C. Strand, "Profilometry With A Coherence Scanning Microscope", 29 Appl. Opt. 3784 (1990), and order counting methods such as described by T.C. Strand and Y. Katzir, "Extended Unambiguous Range Interferometry", 26 Appl. Opt. 4274 (1987).

Multiwavelength schemes (see, for example, U.S. Patents No. 4,832,489 to Wyant et al. and No. 5,127,731 to DeGroot) combine the measured phases from several illumination source wavelengths to produce a phase map corresponding to light of an equivalent wavelength. Thus, for two wavelengths λ_1 and λ_2, the equivalent wavelength λ_{eq} is equal to:

$$\lambda_{eq} = \frac{\lambda_1 \lambda_2}{|\lambda_1 - \lambda_2|}$$

Ambiguities are thereby reduced by a factor of approximately λ_{eq}/λ_1. For very large steps, λ_{eq} must be large and, accordingly, the range is limited by how close together the two wavelengths λ_1 and λ_2 can be made. This places stringent and, in some cases, effectively unattainable requirements on the necessary accuracy of the two wavelengths used, making this method difficult to implement or impractical for very large steps where typical interferometric precision of several angstroms (Å)

-3-

is desired.

Coherence scanning methods -- as for example disclosed in U.S. Patents No. 4,340,306 to Balasubramanian, No. 4,818,110 to Davidson, and No. 5,112,129 to Davidson et al. -- involve measuring the coherence envelope or fringe contrast from broadband light in an equal path interferometer while scanning through the equal path condition, or measuring the coherence envelope from narrow band light as is disclosed in copending U.S. Patent Application Serial No. 07/893,324. The peak of the coherence envelope, corresponding to the maximum fringe contrast, is then determined as a function of scan or translation stage position. This peak contrast position will reflect changes in the heights of surface features and can thus be used to measure those features. Since the coherence envelope must be inferred from the interference fringes, it is however necessary to densely measure the fringes as a function of scan position. This requirement puts enormous demands on storage requirements for typical data, easily exceeding hundreds of megabytes. Thus, most implementations of coherence scanning perform some type of preprocessing; see, for example, P.J. Caber, "The Use Of Digital Signal Processing Techniques For The Interferometric Profiling Of Rough Surfaces", Masters Thesis in Electrical Engineering, University of Arizona (1991). Unfortunately, in addition to markedly increasing system cost, these procedures substantially reduce the rate at which data is taken, even when using high speed digital signal processors (DSP's) for the preprocessing functions. As a consequence, compromises between speed and data

-4-

1   density are required and are typically made in most

2   implementations of coherence scanning, thereby

3   reducing the best available resolutions to the 10-20

4   angstrom range and scanning speeds to less than 0.5

5   μ/sec.

6   Order counting methods attempt to

7   establish the order of the fringe used in the phase

8   shifting calculation by using contrast information

9   to identify the location of that fringe on the

10 coherence envelope function. Broadband illumination

11 is typically used so that the contrast between

12 adjacent fringes changes sufficiently for a unique

13 determination. The inherent limitation in such

14 procedures is that sources which provide good fringe

15 contrast discrimination have insufficient contrast

16 for use with large steps, and sources which provide

17 enough contrast for large steps lose discrimination

18 for small steps.

19   Recently-issued U.S. Patent No. 5,133,601

20 to Cohen et al. discloses several other related

21 methods and arrangements for the profiling of rough

22 surfaces. Common to each is on-the-fly computation

23 and reconstruction, from the stored intensity data,

24 of the modulation envelope waveform for each pixel

25 so as to determine the derived peak intensity value

26 of the central fringe of the envelope, which peak

27 value is then used to determine the relative phase

28 of the central fringe for each of a multiplicity of

29 imaging pixels for use in calculating a step height.

30 The need to compute the modulation waveform for each

31 imaging pixel places significant computational and

32 data storage requirements on the apparatus and

33 notably slows the rate at which profiling of a

34 surface may proceed and, correspondingly, may limit

-5-

the attainable precision of the resulting profile measurements.

There is accordingly an unmet need, particularly for use with interferometric coherence scanning microscopes, for an inexpensive, fast and highly accurate method and apparatus for the rapid acquisition of data used in measuring the profiles of surfaces to a precision typically enjoyed by currently known and practiced interferometric methods and apparatus.

OBJECTS OF THE INVENTION

It is accordingly the desideratum of the present invention to provide a method and apparatus for the rapid acquisition of data for measuring topological surface profiles with high precision.

It is a particular object of the invention to provide such a method and apparatus for the rapid acquisition of data to measure rough surfaces or surfaces with large steps or slopes or other features having or including height differentials that exceed the dynamic range of conventional phase measuring interferometers.

It is another object of the invention to provide such a method and apparatus that enable the realization of this measurement capability very rapidly and inexpensively without requiring excessive computing resources, including computer memory and algorithm execution time, by acquiring data only in the regions of interest and by separating the data acquisition and analysis functions.

It is a further object of the invention to provide such a method and apparatus for the rapid acquisition of data so as to attain a measurement

-6-

1   capability with precision typical of currently-known

2   phase shifting interferometric methods.

3   SUMMARY OF THE INVENTION

4   The present invention provides a method

5   and apparatus for the rapid acquisition of data for

6   the purposes of profiling a surface of an object

7   utilizing coherence scanning techniques. Briefly

8   described, and in accordance with one embodiment

9   thereof, the optical path difference between a

10   reference and test surface of an interferometer is

11   varied while the interferograms produced are imaged

12   onto a solid-state imaging array. The sold-state

13   imaging array is operated in conjunction with the

14   variation of the optical path difference so as to

15   obtain a plurality of interferograms at equally-

16   spaced intervals such that the relative phase

17   difference between successive interferograms is a

18   known and repeatable quantity. For each pixel, an

19   interference discriminator function value is

20   calculated from the current and/or prior frame

21   intensity data as an indication of the presence and

22   approximate magnitude of interference. In one

23   embodiment of the invention, the interference

24   discriminator function is simply the rate of change

25   of intensity, determined by measurement of the local

26   intensity slope. In another embodiment, the

27   inventive method exploits the known phase difference

28   between successive data frames to provide an

29   extremely simple yet effective interference

30   discriminator function that measures the intensity

31   difference between the most recently computed

32   intensity and a running estimate of the intensity

33   background. In still another embodiment, an

34   estimate of contrast or modulation is computed and

-7-

utilized as the interference discriminator function value.

Based on the calculated value or state of the interference discriminator function, a decision is made as to whether to store the current pixel intensity and/or the corresponding intensity data and the relative height or optical path difference. In one embodiment of the invention, the interference discriminator function value is compared to a predetermined threshold and a predetermined amount of consecutive intensity data is taken and stored once the threshold is exceeded. Relative height data is taken, once, at the point at which the predetermined threshold is exceeded. In another embodiment, a circular buffer scheme is implemented whereby a predetermined amount of consecutive intensity data, symmetrically disposed about the interference discriminator function peak, is taken. Relative height data and the interference discriminator function value are taken and stored whenever the most recently computed interference discriminator function value is greater than the value previously stored. The optical path difference is either incrementally or linearly varied through a selected distance, and the foregoing procedure is repeated until intensity data in the region of interference are obtained and stored for each pixel. The inventive apparatus and method then operates on this stored intensity and relative height data to produce a test surface height profile using, by way of example, standard techniques or formulae well known in the art. These techniques may include computing, from the stored intensity data, the modulation or contrast function

-8-

and determining the peak of this function, amplitude demodulation techniques for extracting the modulation envelope from the intensity data and determining the peak thereof, and Fourier transform techniques commonly utilized in laser ranging applications.

Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are designed solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, wherein like reference characters denote similar elements throughout the several views:

Fig. 1 graphically depicts typical data seen by a single imaging device pixel in a coherence scanning microscope when imaging a rough surface;

Fig. 2 is a diagrammatic representation of a preferred embodiment of an apparatus constructed in accordance with the teachings of the present invention and including the principle components of the apparatus;

Fig. 3 is a block diagram of a preferred embodiment of the data acquisition and computer systems of the inventive apparatus of Fig. 2;

Fig. 4 diagrammatically depicts a preferred sequential data frame acquisition and storage method and arrangement in accordance with the present invention, using a circular buffer memory to receive the data gathered for a single

-9-

imaging device pixel during scanning through the equal path condition;

Fig. 5 is a flow diagram of a method for implementing a preferred embodiment of the circular buffer data acquisition and storage arrangement in accordance with the present invention; and

Fig. 6 graphically depicts intensity data obtained from two imaging device pixels during a typical scan through the equal path condition.

DETAILED DESCRIPTION OF THE PREFERRED
EMBODIMENTS

The present invention exploits a number of known facts and principles in a unique and heretofore unrecognized manner. It has long been understood that when short coherence length radiation is used in an equal path interferometer, interference fringes are localized around the equal path condition. This relationship is evident in Fig. 1 which graphically depicts the idealized intensity seen by a single detector pixel when imaging a rough surface with broadband illumination while linearly scanning along the z-axis over a 100μ range. For a typical broadband source, the illumination spectrum encompasses many hundreds of nanometers and generates a sharply defined region of coherence only a few microns wide. The inventive method and apparatus first searches for and identifies this region of coherence. Pixel intensity data is then saved only in the area about the coherence peak, while the remainder of the data is ignored. This on-the-fly preprocessing function significantly reduces the data acquisition time, data storage and computational requirements and subsequent data processing time.

-10-

1   It is also well known that a smooth and
2 constant velocity of z-axis movement can be far more
3 readily attained with a linearly-movable translation
4 stage than by incrementally positioning the stage to
5 predetermined locations with nanometer precision.
6 This latter fact, coupled with the highly accurate
7 timebase of charge-coupled device (CCD) cameras,
8 permits scanning with precise repetitive steps, by
9 virtue of which the phase difference of the light or
10 illumination between successive imaging frames is a
11 known and readily repeatable quantity. The present
12 invention utilizes an on-the-fly preprocessing
13 technique that exploits the known phase separation
14 between successive data-acquisition frames to
15 provide an extremely simple and highly effective
16 interference discriminator function that can be
17 readily built into the apparatus electronics or
18 coded into high speed microprocessors to provide
19 real-time modulation discrimination for the data
20 acquisition function.

21   The present invention differs from prior
22 art coherence scanning methods in that it does not
23 attempt to calculate the test surface profile on-
24 the-fly by determining the position of the coherence
25 envelope peak during the scan. Instead, it
26 advantageously identifies and stores the data only
27 in the area about the interference region, typically
28 reducing the amount of data that must be processed
29 for analysis by over an order of magnitude and
30 thereby notably accelerating the measurement cycle
31 time. This reduction in data storage and/or
32 processing requirements through implementation of
33 the present invention can perhaps best be
34 appreciated through the following example. Consider

-11-

a 100μ scan, a 600nm mean illumination wavelength, an 8-bit digitization precision per pixel, and a 60 Hz, 256 x 256 pixel camera array for a total of 65536 pixels. If each frame is separated by 90 degrees of phase, the frame-to-frame z-axis spacing will be 75nm, and 1333 frames will be required to cover the full 100μ scan. At one byte per pixel, this example will require almost 87.4 Mb of storage, i.e. a data processing rate of almost 4Mb/s, to keep pace in real time with the camera frame rate. If, on the other hand, data is stored (in accordance with the present invention) only within and in the area about 1.5μ of the center of the interference region (i.e. 3μ total peak width), then only 2.6 Mb of data storage will be required to retain all of the information necessary for a complete test surface profile measurement in accordance with the invention. This represents a decrease in storage requirements by more than a factor of 30, with a corresponding reduction in processing time and resources and a significant improvement in the speed of data acquisition.

The present invention also differs from known multi-wavelength phase shifting interferometer apparatus and methods in that it provides a simple and effective manner of determining the height difference between pixels whose phase difference exceeds one-half fringe, without the need for multiple wavelength acquisitions or well-defined and accurately-known source wavelengths. Unlike multi-wavelength schemes, the present invention is inherently nonambiguous for all topological step sizes.

The invention additionally differs from

-12-

order counting methods in that the intrinsic limit
to the measurable step height is independent of the
source coherence properties.

     The principle elements and components of
an embodiment of an apparatus constructed in
accordance with the teachings of the present
invention, as incorporated into or used in
conjunction with an interferometric microscope, are
illustrated in Fig. 2.   The interferometric
microscope 1 includes an illumination subsystem 2,
having a preferably broadband light source 3 of
average wavelength λ, a condenser lens 5, a field
stop 7, a spectral filter 9, a light level control
element 11 such as a variable neutral density
filter, and an optical system 13 for transferring
the emitted light 4 into the optical axis of the
interferometric microscope 1.   The microscope
further includes a coarse focus stage 17, an
interferometer consisting of a beamsplitter 20 for
splitting the source light 4 into a reference beam
6 and a test beam 8, a reference surface 22 of known
topography, and an object having a surface or
surface portion to be profiled, hereinafter referred
to as the surface under test or test surface 14.
Also provided as a part of the microscope 1 is an
objective 19 for focusing the test beam 8 onto the
test surface 14.   In a currently preferred (but
nonetheless illustrative) embodiment of the
inventive apparatus, the interferometer and
objective are combined using a commercially-
available Mirau interferometric objective.

     The inventive apparatus of Fig. 2 further
includes an imaging array such as a charge-coupled
device (CCD) camera 18 located at the back focus of

-13-

the objective 19 for receiving and detecting or
reading the interferometer data; a constant velocity
z-axis translation stage 16 depicted, by way of
example, in a configuration which translates the
test leg of the interferometer, a data acquisition
system (DAS) 25 for acquiring and storing the
interference data, and a computer system 45 for
analyzing the data and displaying calculated
results. The computer system 45 variably controls
the source light level through a light level control
line 37, controls the constant velocity translation
stage through translation stage control lines 35,
and communicates with the data acquisition system 25
through DAS control lines 31. The DAS 25, in turn,
controls the camera 18 and receives data from the
camera by way of the video and control lines 30.

The camera 18, DAS 25, constant velocity
stage 16 and computer system 45 of the currently
preferred embodiment are illustrated in further
detail in Fig. 3. This arrangement of elements is
operable, in accordance with the invention, for
gathering or acquiring interference data
symmetrically placed about the highest value of the
interference discriminator function as the
translation stage is axially scanned through the
equal path condition. The DAS 25 includes an analog
to digital (A/D) converter element 50 for digitizing
the camera video output signal 66 as sampled at
intervals controlled by pulses from the pixel clock
signal 68, a frame counter 56 which incrementally
tracks the frame number by using, for example, the
vertical synch pulse 70, a frame memory 62 for
storing the frame number corresponding to the last
or most recently measured interference discriminator

-14-

1   function peak for each pixel, a data memory 58
2   configured such that each pixel has a sequence of
3   consecutive memory locations acting as a circular
4   buffer of length NBUF for storing NBUF intensity
5   values, per pixel, symmetrically placed about the
6   last measured interference discriminator function
7   peak, a ring pointer counter 54 which provides the
8   low order addresses (i.e. the circular buffer
9   addresses) and is incremented once per frame by, for
10   example, the vertical synch pulse 70, an address
11   generator 52 for supplying the high order addresses
12   (i.e. the pixel addresses) and which is incremented
13   once for each pixel by the pixel clock signal 68 and
14   is zeroed for each new frame by the vertical synch
15   pulse 70, a peak interference discriminator memory
16   60 for storing the last (i.e. most recent or
17   current) interference discriminator function peak
18   value, a previous intensity memory 61 of sufficient
19   size for storing one or more previous intensity
20   values for each pixel for use in the interference
21   discriminator function calculations, and a
22   controller element 64 incorporating a fast digital
23   comparator for interference discriminator function
24   peak detection, arithmetic logic for interference
25   discriminator function calculations and controller
26   logic for initiating frame number storage, intensity
27   data storage, and peak interference discriminator
28   function value storage as and when appropriate.
29   Each of the memories 58, 60, 61 and 62 may, by way
30   of example, be conveniently implemented using
31   readily available random access memory (RAM).
32   A preferred embodiment of the present
33   invention utilizes an interference discriminator or
34   discriminator function that operatively exploits the

-15-

known phase separation between successive data-
acquisition frames to provide an extremely simple
yet unusually effective on-the-fly preprocessing
arrangement and functionality. The interference
discriminator function or algorithm can be readily
implemented in high speed digital or analog
electronics and/or coded into high speed
computational processors so that storage decisions
can be made rapidly and in real-time on a pixel-by-
pixel basis. The intensity data waveform of Fig. 1
demonstrates the need for a discriminator or
discriminator function that is sensitive only to the
high frequency modulation associated with
interference and effectively ignores the relatively
low frequency background illumination resulting from
test surface scatter and defocus. Although this
background illumination is low frequency, it can
have large amplitudes which may cause a purely
amplitude-based discriminator, i.e. an intensity
peak detector, to perform poorly on rough test
surfaces. Thus, in its most preferred forms, the
interference discriminator function operates to
locate, in the pixel intensity data being received
on a real-time basis, the region of high frequency
signals which represents the region of interference
and the location of the coherence peak. Toward this
end, the present invention defines, for each pixel,
a low pass filter which roughly follows the shape of
the background illumination even during
interference. The inventive method subtracts the
filter's estimate of the current background
illumination from the detected current pixel
intensity to obtain an estimate of the interference
amplitude. Data is then saved only in the region

-16-

about the peak value of this interference
discriminator function. It is important to
recognize that the low pass filter need not be of
high accuracy since it is only utilized to
discriminate or locate the region of peak
interference, and the analysis is capable of
identifying most cases in which the data is not
symmetrically placed about the interference
discriminator function peak. In practice, for this
first preferred embodiment -- which produces a 90
degree phase difference between successive frames --
an exceptionally effective notch filter is employed
in lieu of a low pass filter. The notch filter
function $N(f)$ is defined by the average of the
current pixel intensity and the intensity of that
same pixel two frames prior to the current frame,
i.e.:

$$N(f) = \frac{I_f + I_{f-2}}{2}$$

where I_f and I_{f-2} are the intensities seen by a
particular pixel at frame numbers f and f-2,
respectively. This notch filter relationship
exploits the fact that pixel intensities separated
by two frames are 180 degrees out of phase and are
therefore insensitive to the frequencies produced by
the interference illumination. Subtracting the
notch filter function from the current frame
intensity I_f yields the relationship employed for
implementing the interference discriminator function
$ID(f)$ in this first preferred embodiment of the
invention:

$$ID(f) = I_f - I_{f-2} .$$

This extremely simple relationship provides all of
the interference discrimination necessary for on-

the-fly acquisition of pixel intensity data about, and only about, the coherence peak. As should be apparent, an overall factor of two in this relationship has been omitted, a permissible omission since only peak discriminator function values, rather than specific amplitudes, are required in the inventive method of dynamically locating and identifying the coherence peak.

Another embodiment of the present invention utilizes the local slope of the pixel intensity values to implement the interference discriminator. The interference discriminator function $ID(f)$ in this case is defined by the relationship:

$$ID(f) = I_f - I_{f-1}$$

where I_f and I_{f-1} are the intensities seen by a particular pixel at consecutive frame numbers f and $f-1$, respectively. This second embodiment uses less memory at the cost of a small decrease in interference discriminator dynamic range and can be employed without modification irrespective of the inter-frame separation -- i.e. the consecutive frame-to-frame separation is not limited to a 90 degree phase difference. Indeed, this concept may be further extended to an embodiment in which, by way of example, an inter-frame phase difference of 120 degrees is utilized, by employing an interference discriminator function $ID(f)$ defined by the relationship

$$ID(f) = 2I_f - I_{f-1} - I_{f-2}$$

where, as should now be apparent, I_f, I_{f-1} and I_{f-2} denote the intensities seen by a particular pixel at frame numbers f, $f-1$ and $f-2$, respectively. Analogous interference discriminator function

-18-

relationships utilizing the measured intensity values, for a particular pixel, at the current frame and at a multiplicity of prior frames, may similarly be defined and employed.

Still another embodiment of the present invention utilizes simple thresholding of the interference discriminator to initiate data taking of the next NBUF consecutive intensity values for each pixel. Here, the interference discriminator function operates to identify regions of measured signal intensity greater than the estimated illumination background or noise. An suitable threshold value will generally be determined empirically and selected so as to assure that data taking is not triggered by the illumination background or noise. In this final disclosed embodiment, the peak interference discriminator memory 60 of Fig. 3 will not be required and the frame memory 62 will store, by way of example, the frame number at which the threshold is first exceeded.

With further reference to Fig. 3, the computer system 45 includes a microprocessor 46, one or more input/output (I/O) elements 48 which buffer microprocessor control lines such as the translation stage control line 35, the light level control line 37 and DAS multiplexor and control lines 76, and a monitor 47 for displaying system status, measured data and calculated results. In the herein described methods and apparatus of the invention, the computer system 45 is not computationally active during data gathering or acquisition but, rather, initializes the DAS 25, sets up the ring pointer counter to count from zero (0) to NBUF, and controls

1   the starting and stopping of the data acquisition
2   sequence.
3   Data acquisition proceeds, by way of
4   example, in the following manner. The operator
5   enters into the computer system 45 parameters for
6   controlling the measurement and data analysis
7   sequences such, by way of illustration and not
8   limitation, as scan length, number of scans, and
9   type of processing algorithm to be employed. Using
10 this information the computer system 45 calculates
11 the appropriate translation stage speed, clears the
12 frame memory 62 and peak contrast memory 60, sets
13 the maximum count NBUF and zeros the ring pointer
14 counter 54, zeros the address generator 52, zeros
15 the frame counter 56 and generally initializes the
16 DAS 25. The operator then positions the test
17 surface 14, or a predetermined topological feature
18 or portion of the test surface, in optical alignment
19 with the camera 18, adjusts focus on the test
20 surface using the coarse focusing adjustment stage
21 17 to assure that the feature of interest passes
22 through focus during the scan, and initiates the
23 measurement cycle via the keyboard or other
24 appropriate I/O device of the computer system 45.
25 The source illumination intensity is adjusted by the
26 light level control element 11 so that the light
27 intensity falling on each pixel of the camera 18 is
28 within the dynamic range of the camera; a special or
29 separate light level calibration scan may be
30 necessary to assure that the adjustment is within
31 the dynamic range as described hereinbelow. The
32 microprocessor 46 then directs linear movement of
33 the translation stage 16 at a constant velocity
34 along the z-axis such that a predetermined distance

-20-

is traveled during the interval between successive
data-gathering camera frames.

A preferred embodiment of the inventive
method will now be described. Assuming, by way of
typical example, a 60 Hz camera, a mean light
wavelength of 600nm (i.e. 300nm fringe spacing), and
a standard 5-bucket data analysis algorithm, the
z-axis translation speed would be set to 4.5μ/sec so
as to provide a 75nm spacing between adjacent-in-
time data points, representing a 90 degree phase
shift between successive data points or frames.

After the operator properly positions and
focuses the test surface 14 and initiates the
measurement cycle, the microprocessor 46 starts the
calibration scan by commanding movement of the
linear translation stage in one direction at the
predetermined or calculated speed to produce a 90
degree, as is preferred, phase shift between
successive frames. The output from each camera or
imaging device pixel is then digitized by A/D
converter element 50 and its value is compared,
using controller logic element 64, to saturation as
defined by a predetermined value. If saturated, the
light level controller element 11 is instructed to
reduce the light or illumination source intensity
level. The new digitized intensity value is also
compared to the corresponding value in data memory
60 which, for purposes of this light level setting
scan only, holds the peak intensity measured at each
pixel. If the newly-found intensity value is
greater than the previously-saved value, then the
current value is saved. It should be noted that the
ring pointer counter 54 and the frame counter 56 are
not incremented during this initial or light level

-21-

calibration scan. After the maximum scan distance input by the operator has been traveled, further z-axis movement of the translation stage 16 is halted. The microprocessor 46 then checks the peak pointer memory 60 and data memory 58 for the maximum intensity value and adjusts the light level control element 11 to modify the light level, if and as needed, so that the maximum intensity measured is just below saturation. This light level is then locked in place. It should also be pointed out that under certain conditions of known test surface properties, the above-described calibration scan may not be necessary or may be performed manually.

The microprocessor 46 next zeros the address generator 52, clears the data memory 58, and operatively instructs reverse direction z-axis movement of the translation stage 16. The translation stage 16 then travels at a constant velocity such that a predetermined distance is traveled during each camera frame time. Most preferably, this velocity is identical to the translation velocity in the previous calibration or light level setting scan. During this second or reverse direction scan, the frame counter 56 and ring pointer counter 54 are each incremented by one for each successive camera frame.

Consider, by way of example -- and with reference to the flow chart of Fig. 5 -- the events that take place at a particular frame number NFRAME utilizing the first above-described embodiment of the interference discriminator function. The ring pointer counter has a value NRING equal to NFRAME modulo NBUF. At pixel number NPIXEL, the address generator 52 produces address NPIXEL and the video

-22-

1   line 66 is digitized at A/D element 50 to obtain the

2   current intensity value for that pixel. The

3   controller 64 retrieves, from previous intensity

4   memory 61, the stored pixel intensity from frame

5   NFRAME-2 and subtracts this value from the current

6   frame intensity value to obtain the current value of

7   the interference discriminator function. The

8   controller 64 then replaces the intensity value from

9   frame NFRAME-2 in the previous intensity memory 61

10 with the current frame intensity value. The current

11 interference discriminator function value is then

12 compared to the previous peak interference

13 discriminator function value for that pixel as

14 stored in the peak interference discriminator memory

15 60 at address NPIXEL and, if greater, the present

16 value of the frame counter 56 is stored in peak

17 frame memory 62, the current interference

18 discriminator function value is stored in the peak

19 interference discriminator memory 60, and the

20 current frame intensity is stored in the data memory

21 58 at the location given by the address generator

22 plus the current ring pointer counter (i.e. NPIXEL

23 + NRING). If the new interference discriminator

24 function value is less than the previous stored peak

25 interference discriminator function value, and the

26 difference between the current frame number and the

27 frame number of the last stored peak is less than

28 NBUF/2, then the current frame intensity value is

29 stored in the data memory 58 at the location defined

30 by the address generator plus the current ring

31 pointer counter (i.e. NPIXEL + NRING). Otherwise,

32 the current frame intensity value is ignored. As

33 should be apparent, the frame number of the last

34 peak interference discriminator function value is

-23-

retrieved by accessing the contents of peak frame memory 62 at location NPIXEL.

Fig. 4 depicts the filling of the circular buffer 58 with digitized intensity values as the apparatus scans through the coherence peak, and shows the contents of various counters and memory elements after each frame. What should be immediately apparent is that in order to be assured that the circular buffer memory 58 will contain data before the main or central peak, secondary peaks must be present to trigger the data taking process before the main peak is encountered. This requirement is readily fulfilled by narrowing the spectral width of the illuminator bandpass filter 9. The narrower the spectral width, the longer the coherence length and the greater the number of interference fringes that will appear about the central fringe. If the spectral filter width is too narrow, on the other hand, the ability to distinguish the central fringe from the surrounding fringes will be effectively lost. The optimum filter width will be dependent on the digitization resolution and system noise but, in any event, filter widths of approximately 100nm to 150nm will provide sufficient modulation for most cases. Furthermore, the number of data points taken between successive interference peaks must be less than NBUF/2 to assure that no data is lost because the difference in frames exceeds NBUF/2 before the next interference fringe is encountered.

After a predetermined distance of linear z-axis travel, further movement of the translation stage 16 is halted. At this time the data memory 58 will contain a set of data points for each pixel.

-24-

1   These data points will be contiguous (i.e. taken at
2   successively contiguous camera frames) for each
3   pixel, with equal fringe phase separation, and will
4   straddle the coherence envelope approximately
5   equally as shown in Fig. 6. The smooth sinusoidal
6   curves in Fig. 6 represent the instantaneous
7   intensity seen at two respective imaging device
8   pixels, with the illustrated data points being the
9   discrete scanned intensity data taken at 90 degree
10   intervals; the number at the lower left of each Fig.
11   6 curve represents the frame number of the first
12   data point in the series. For any given pixel, the
13   frame number stored in peak frame memory 62 is
14   associated with only one data point in the circular
15   buffer memory 58. The position of this data point
16   in the circular buffer can be identified by
17   calculating the stored peak frame value modulo NBUF.
18   Those data points are used to associate each
19   circular buffer with a particular z-axis position in
20   the linear scan. The frame numbers for other
21   intensity data points in the circular buffer are
22   obtained by adding the point's offset relative to
23   the peak interference discriminator function data
24   point to the frame number of the peak interference
25   discriminator function data point. Thus sufficient
26   information is available to permit analysis of the
27   stored data points and values using any suitable
28   methods known in the art such, for example, as
29   amplitude demodulation, modulation curve fitting,
30   and Fourier transform techniques.
31   It should be pointed out that, as used in
32   this specification and disclosure, and in the
33   appended claims, the term "peak" is intended to be
34   understood in a broad sense as referring to an

-25-

extremum. Persons skilled in the pertinent arts will recognize that certain interferometer constructions can influence the phase of the central coherence peak to produce a minimum, rather than a maximum, interference discriminator function or contrast or intensity value as mentioned in the various embodiments described hereinabove. Alternatively in such cases, the method and apparatus may search for these extrema using an enlarged circular buffer of sufficient size (i.e. number of storage locations per pixel) to assure that sufficient data is gathered about the true extremum. The true extremum or "peak" can then be determined through post-processing of the data.

Furthermore, although the method and apparatus of the invention have been described in embodiments using a broadband source of illumination, as is generally preferred, a narrow band illumination source may also be alternatively employed, particularly when using an objective with a large numerical aperture. These and other modifications and variations are fully within the intended scope and contemplation of the invention.

Thus, while there have been shown and described and pointed out fundamental novel features of the invention as applied to several specific and preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the disclosed invention may be made by those skilled in the art without departing from the spirit of the invention. It is expressly intended that all combinations of those elements and steps which perform substantially the same function in substantially the same way to

-26-

1   achieve the same results are within the scope of the
2   invention.   It is the intention, therefore, to be
3   limited only as indicated by the scope of the claims
4   appended hereto.

-27-

CLAIMS

What is claimed is:

1.   A method of rapid acquisition of data for profiling a surface of an object, comprising the steps of:

(a)   positioning the object surface along an optical axis so that a predetermined feature of the object surface is optically aligned with an imaging array of an imaging device;

(b)   producing an interference pattern of the object surface by means of an interferometer and operating the imaging device to record said interference pattern;

(c)   varying the optical path difference between the object surface and a reference surface of the interferometer over a predetermined range including a position of zero optical path difference for each pixel of the imaging array;

(d)   operating the imaging array in conjunction with said varying of the optical path difference so as to receive, at each pixel of the imaging array, intensity values at equally spaced intervals defined by a predetermined phase difference between successive images taken along the varying optical path difference;

(e)   applying the intensity values received by each pixel to an interference discriminator for determining for each said pixel whether interference is present;

(f)   storing for each said pixel a plurality of intensity values in a region of interference identified by the interference discriminator;

(g)   storing concurrently with at least

-28-

one of said stored intensity values for each said pixel the relative position along said predetermined range of said at least one stored intensity value; and

(h) determining the height of said predetermined object surface feature by computing, using said stored intensity values and said stored relative position of each said pixel, the position along said range of zero optical path difference for said each pixel.

2. The method of claim 1, wherein said step (e) further comprises applying said received intensity values to the interference discriminator in real-time as said intensity values are received at the imaging device pixels so as to identify said interference region data on-the-fly, wherein said step (f) further comprises storing said plurality of intensity values in real-time as received at the imaging device pixels and identified by the interference discriminator as being located in said interference region, and wherein said step (g) further comprises storing said relative position of the at least one of said stored intensity values in real-time as said intensity values are received at the imaging device pixels and identified by the interference discriminator as being located in said interference region.

3. The method of claim 1, wherein said predetermined phase difference is 90 degrees.

4. The method of claim 3, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference discriminator *ID* defined by the functional relationship

-29-

$$ID(f) = I_f - I_{f-2}$$

where I_f and I_{f-2} denote the received intensity values for said pixel at data points f and $f-2$ of a series of consecutive data points $f-2$, $f-1$, f.

5.   The method of claim 1, wherein said predetermined phase difference is 120 degrees.

6.   The method of claim 5, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference discriminator ID defined by the functional relationship

$$ID(f) = 2I_f - I_{f-1} - I_{f-2}$$

where I_f, I_{f-1} and I_{f-2} denote the received intensity values for said pixel at respective data points f, $f-1$ and $f-2$ of a series of consecutive data points $f-2$, $f-1$, f.

7.   The method of claim 1, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference discriminator ID defined by the functional relationship

$$ID(f) = I_f - I_{f-1}$$

where I_f and I_{f-1} denote the received intensity values for said pixel at data points f and $f-1$ of a series of consecutive data points $f-1$, f.

8.   The method of claim 1, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference discriminator comprising a high pass filter operable for identifying in said received intensity values data generated by background illumination.

9.   The method of claim 1, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference

-30-

1   discriminator comprising a threshold detector.

2   10. The method of claim 1, wherein said
3   step (f) comprises storing said plural received
4   intensity values for each said pixel in a circular
5   buffer having a predetermined plurality of storage
6   locations for each said pixel.

7   11. A method of determining a height of
8   a point on an object surface, comprising the steps
9   of:

10   (a) positioning an object surface along
11   an optical axis so that a predetermined point on the
12   object surface is optically aligned with an imaging
13   device;

14   (b) producing an interference pattern of
15   the object surface location by means of an
16   interferometer to produce an intensity value at a
17   pixel of the imaging device;

18   (c) varying an optical path difference
19   between the object surface and a reference surface
20   of the interferometer through a predetermined range
21   including a position of zero optical path difference
22   for said point;

23   (d) receiving at said imaging device
24   pixel, as the optical path difference is varied
25   through said predetermined range, a plurality of
26   intensity values of the interference pattern at
27   randomly-selected consecutive data points spaced
28   along said range by a predetermined phase
29   difference;

30   (e) applying said received intensity
31   values to an interference discriminator for
32   identifying in said intensity values a region of
33   high frequency interference data;

34   (f) storing a plurality of the received

-31-

intensity values in the region of high frequency interference identified by said interference discriminator;

(g) storing concurrently with at least one of said stored intensity values the relative position along said predetermined range of said at least one stored intensity value; and

(h) determining the height of said predetermined object surface location by calculating, using said stored intensity values and said stored relative position, the position along said range of zero optical path difference for said point.

12. The method of claim 11, wherein said step (e) further comprises applying said received intensity values to the interference discriminator in real-time as said intensity values are received at the imaging device pixel so as to identify said region of high frequency interference data on-the-fly, and said step (f) further comprises storing said plurality of intensity values in real-time as received at the imaging device pixel and identified by the interference discriminator as being located in said region of high frequency interference.

13. The method of claim 11, wherein said predetermined phase difference is 90 degrees.

14. The method of claim 13, wherein said step (e) comprises applying said received intensity values to an interference discriminator ID defined by the functional relationship

$$ID(f) = I_f - I_{f-2}$$

where I_f and I_{f-2} denote the received intensity values for said pixel at data points f and $f-2$ of a series of consecutive data points $f-2$, $f-1$, f.

-32-

15. The method of claim 11, wherein said predetermined phase difference is 120 degrees and said step (e) comprises applying said received intensity values to an interference discriminator ID defined by the functional relationship

$$ID(f) = 2I_f - I_{f-1} - I_{f-2}$$

where I_f, I_{f-1} and I_{f-2} denote the received intensity values for said pixel at respective data points f, $f-1$ and $f-2$ of a series of consecutive data points $f-2$, $f-1$, f.

16. The method of claim 11, wherein said step (e) comprises applying said received intensity values to an interference discriminator ID defined by the functional relationship

$$ID(f) = I_f - I_{f-1}$$

where I_f and I_{f-1} denote the received intensity values for said pixel at data points f and $f-1$ of a series of consecutive data points $f-1$, f.

17. The method of claim 11, wherein said step (e) comprises applying said received intensity values to an interference discriminator comprising a high pass filter operable for identifying in said received intensity values data generated by background illumination.

18. The method of claim 11, wherein said step (e) comprises applying said received intensity values to an interference discriminator comprising a threshold detector.

19. The method of claim 11, wherein said step (f) comprises storing said plural received intensity values in a circular buffer having a predetermined plurality of storage locations.

20. The method of claim 11, wherein said step (e) comprises applying the received intensity

values to an interference discriminator which subtracts, from each received intensity value, an estimate of then-current background illumination to thereby provide an estimate of current interference amplitude at the current position of the varying optical path difference.

21. The method of claim 20, wherein said step (e) further comprises locating a peak value among said current interference amplitude estimates.

22. The method of claim 21, wherein said step (f) comprises storing a plurality of the received intensity values of the interference pattern at consecutive data points about said peak value located in said step (e).

23. A method of rapid acquisition of data for profiling a surface of an object, comprising the steps of:

(a) positioning an object along an optical axis so that a predetermined feature of the object surface is optically aligned with an imaging device;

(b) producing an interference pattern of the object surface by means of an interferometer and an illumination source to produce an intensity value on the imaging device for each pixel of an image of the object surface, each said pixel corresponding to a location on the object surface;

(c) varying an optical path difference between the object surface and a reference surface of the interferometer through a predetermined range including a position of zero optical path difference for each said location;

(d) receiving at each said pixel

-34-

intensity data as the optical path difference is
varied through said predetermined range;

(e) applying said received data for each
said pixel to an interference discriminator operable
for locating the presence of interference in said
received data;

(f) storing for each said pixel a
plurality of intensity values of the interference
pattern, as located by the interference
discriminator, at randomly-selected consecutive data
points spaced along said predetermined range by a
predetermined phase difference;

(g) storing, for each said pixel,
concurrently with at least one of stored intensity
values for said pixel the relative position along
said predetermined range of said at least one stored
intensity value; and

(h) determining a difference in height
between two selected locations on the object
surface, said two selected locations corresponding
to respective first and second imaging device
pixels, by calculating for each of said first and
second pixels, using said stored intensity values
and stored relative position, the position along
said range of zero optical path difference for the
corresponding selected location.

24. The method of claim 23, wherein said
step (h) comprises the steps of:

i. for each of said first and
second pixels, calculating the position in said
stored randomly-selected consecutive data
points of the data point of zero optical path
difference;

ii. calculating a difference between

-35-

the relative positions along said predetermined range stored in said step (g) for said first and second pixels; and

        iii. calculating a relative height difference between the two selected pixel locations by applying the calculated results from steps (i) and (ii) above.

        25. The method of claim 23, wherein said step (e) further comprises applying said received intensity values for each said pixel to the interference discriminator in real-time as said intensity values are received at the imaging device pixel so as to identify said region of high frequency interference data on-the-fly, and said step (f) further comprises storing said plurality of intensity values for each said pixel in real-time as received at the imaging device pixel and identified by the interference discriminator as being located in said region of high frequency interference.

        26. The method of claim 23, wherein said predetermined phase difference is 90 degrees.

        27. The method of claim 26, wherein said step (e) comprises applying said received intensity values for each said pixel to an interference discriminator ID defined by the functional relationship

$$ID(f) = I_f - I_{f-2}$$

where I_f and I_{f-2} denote the received intensity values for said each pixel at data points f and $f-2$ of a series of consecutive data points $f-2$, $f-1$, f.

        28. The method of claim 23, wherein said predetermined phase difference is 120 degrees and said step (e) comprises applying said received intensity values for each said pixel to an

-36-

interference discriminator *ID* defined by the
functional relationship

$$ID(f) = 2I_f - I_{f-1} - I_{f-2}$$

where I_f, I_{f-1} and I_{f-2} denote the received intensity
values for said each pixel at respective data points
f, *f-1* and *f-2* of a series of consecutive data
points *f-2*, *f-1*, *f*.

> 29. The method of claim 23, wherein said
step (e) comprises applying said received intensity
values for each said pixel to an interference
discriminator *ID* defined by the functional
relationship

$$ID(f) = I_f - I_{f-1}$$

where I_f and I_{f-1} denote the received intensity values
for said each pixel at data points *f* and *f-1* of a
series of consecutive data points *f-1*, *f*.

> 30. The method of claim 23, wherein said
step (e) comprises applying said received intensity
values for each said pixel to an interference
discriminator comprising a high pass filter operable
for identifying in said received intensity values
for each said pixel data generated by background
illumination.

> 31. The method of claim 23, wherein said
step (e) comprises applying said received intensity
values for each said pixel to an interference
discriminator comprising a threshold detector.

> 32. The method of claim 23, wherein said
step (f) comprises storing said plural received
intensity values for each said pixel in a circular
buffer having a predetermined plurality of storage
locations for said each pixel.

> 33. The method of claim 23, wherein said
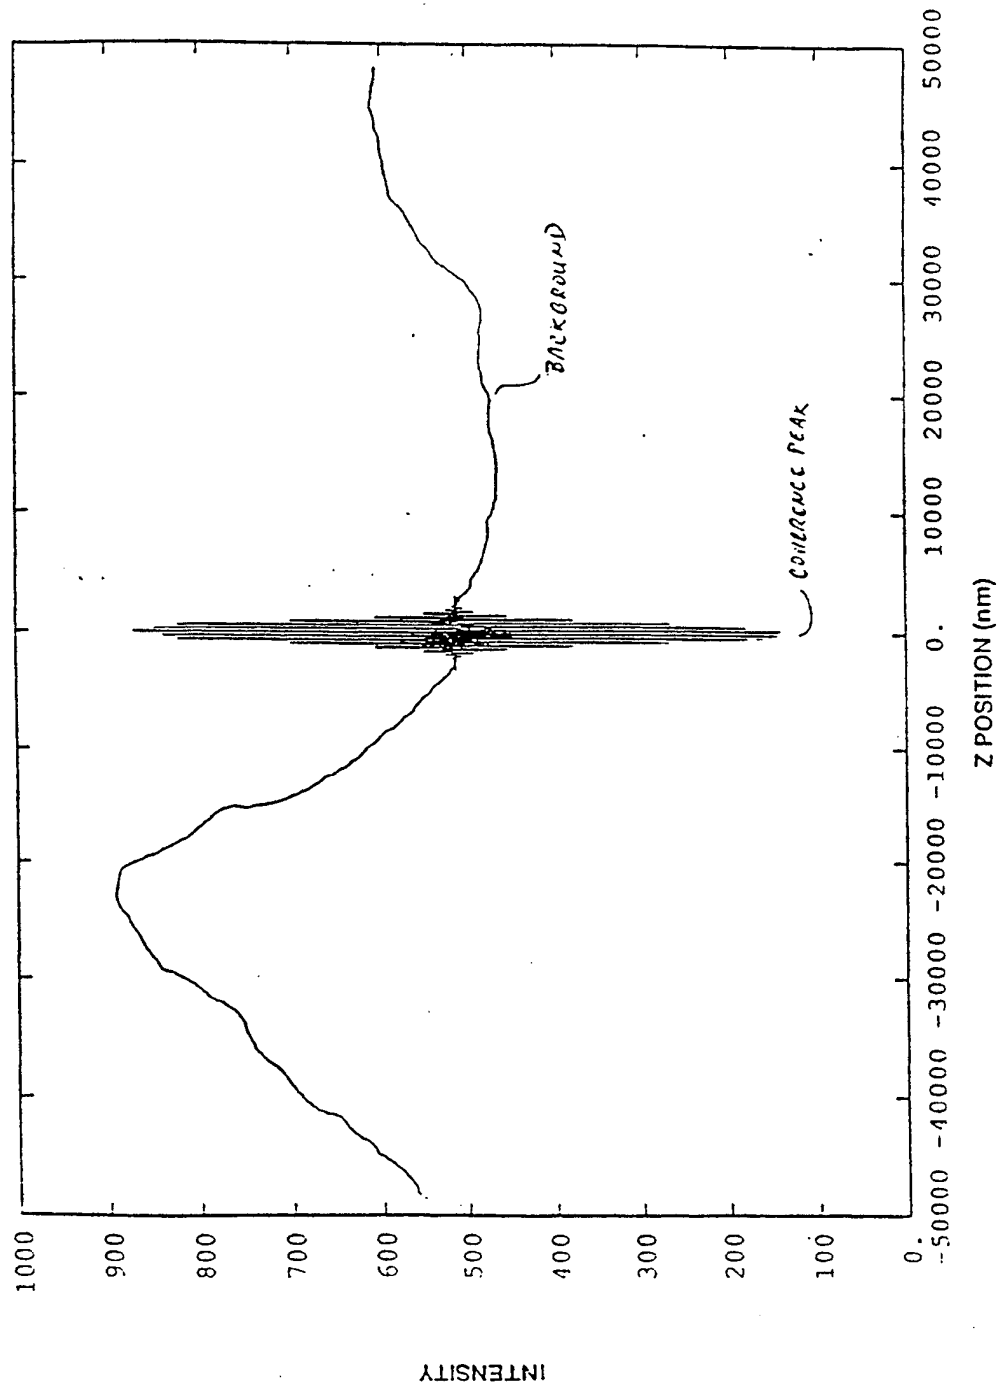step (e) comprises, for each said pixel, applying

-37-

the received intensity values to an interference discriminator which subtracts, from each received intensity value, an estimate of then-current background illumination to thereby provide an estimate of current interference amplitude at the current position of the varying optical path difference.
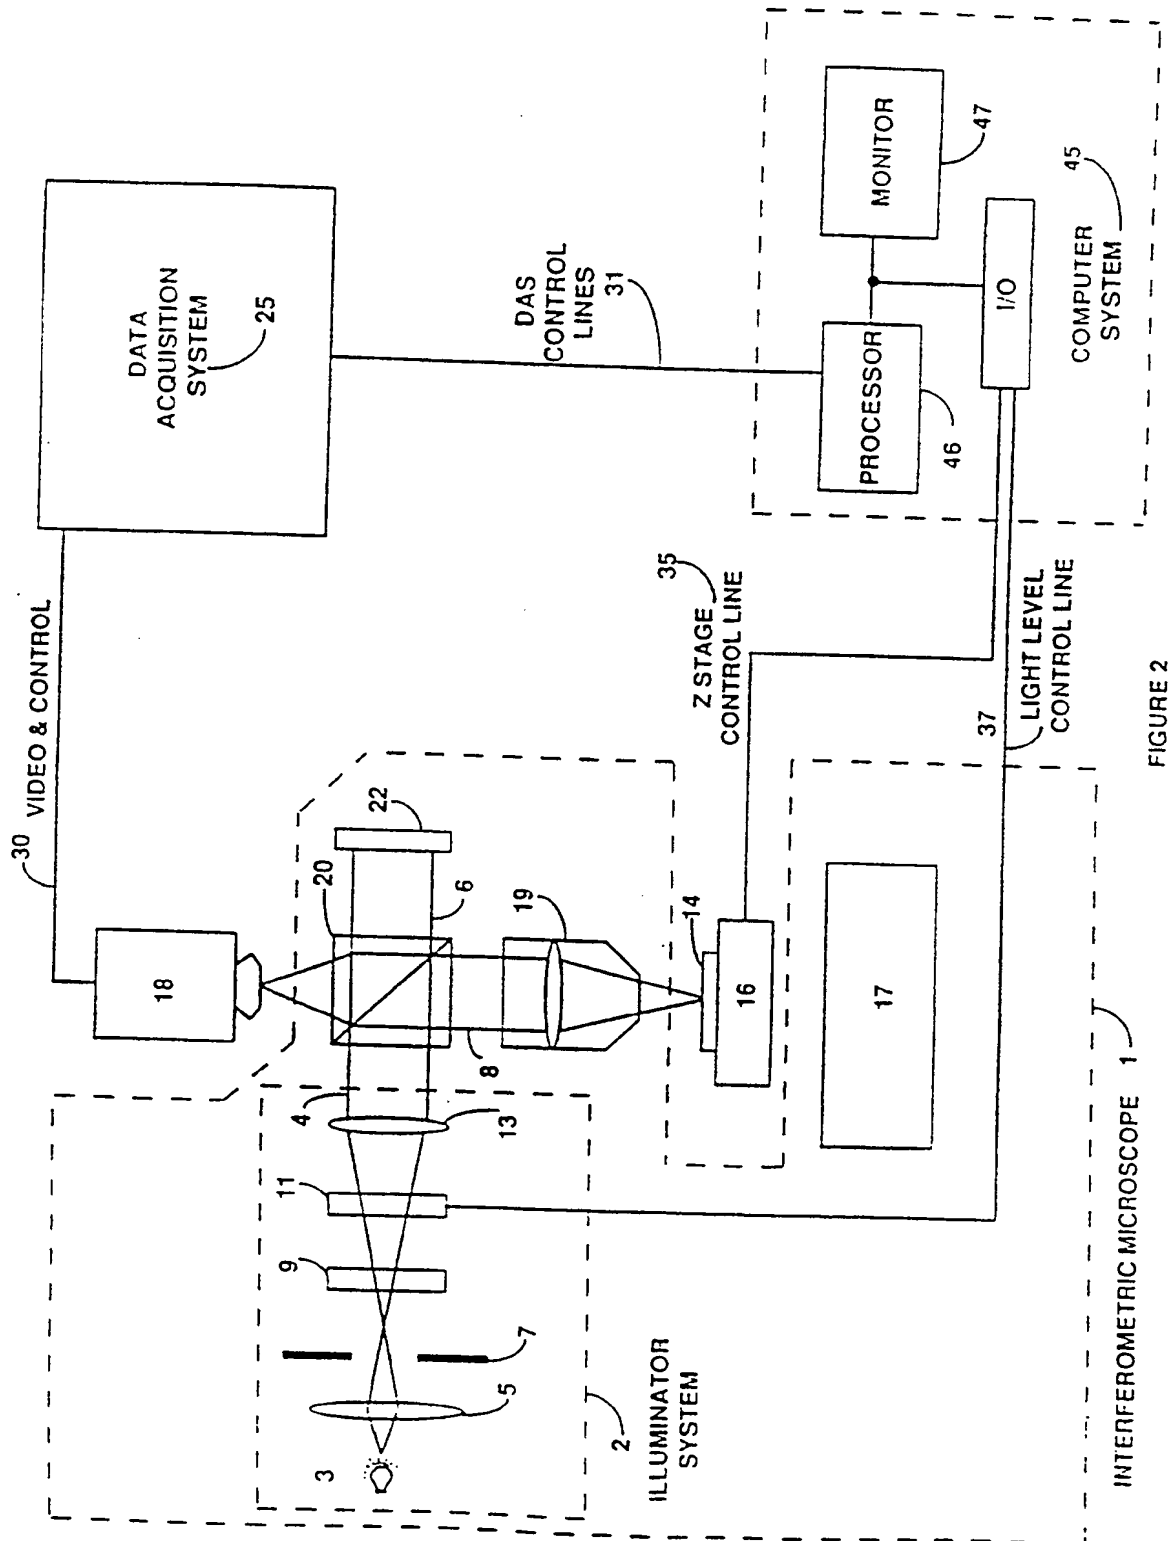
34.   The method of claim 33, wherein said step (e) further comprises, for each said pixel, locating a peak value among said current interference amplitude estimates.

35.   The method of claim 34, wherein said step (f) comprises, for each said pixel, storing a plurality of the received intensity values of the interference pattern at consecutive data points about said peak value located in said step (e).

FIGURE 1: PIXEL INTENSITY vs Z FOR WHITE LIGHT

FIGURE 2

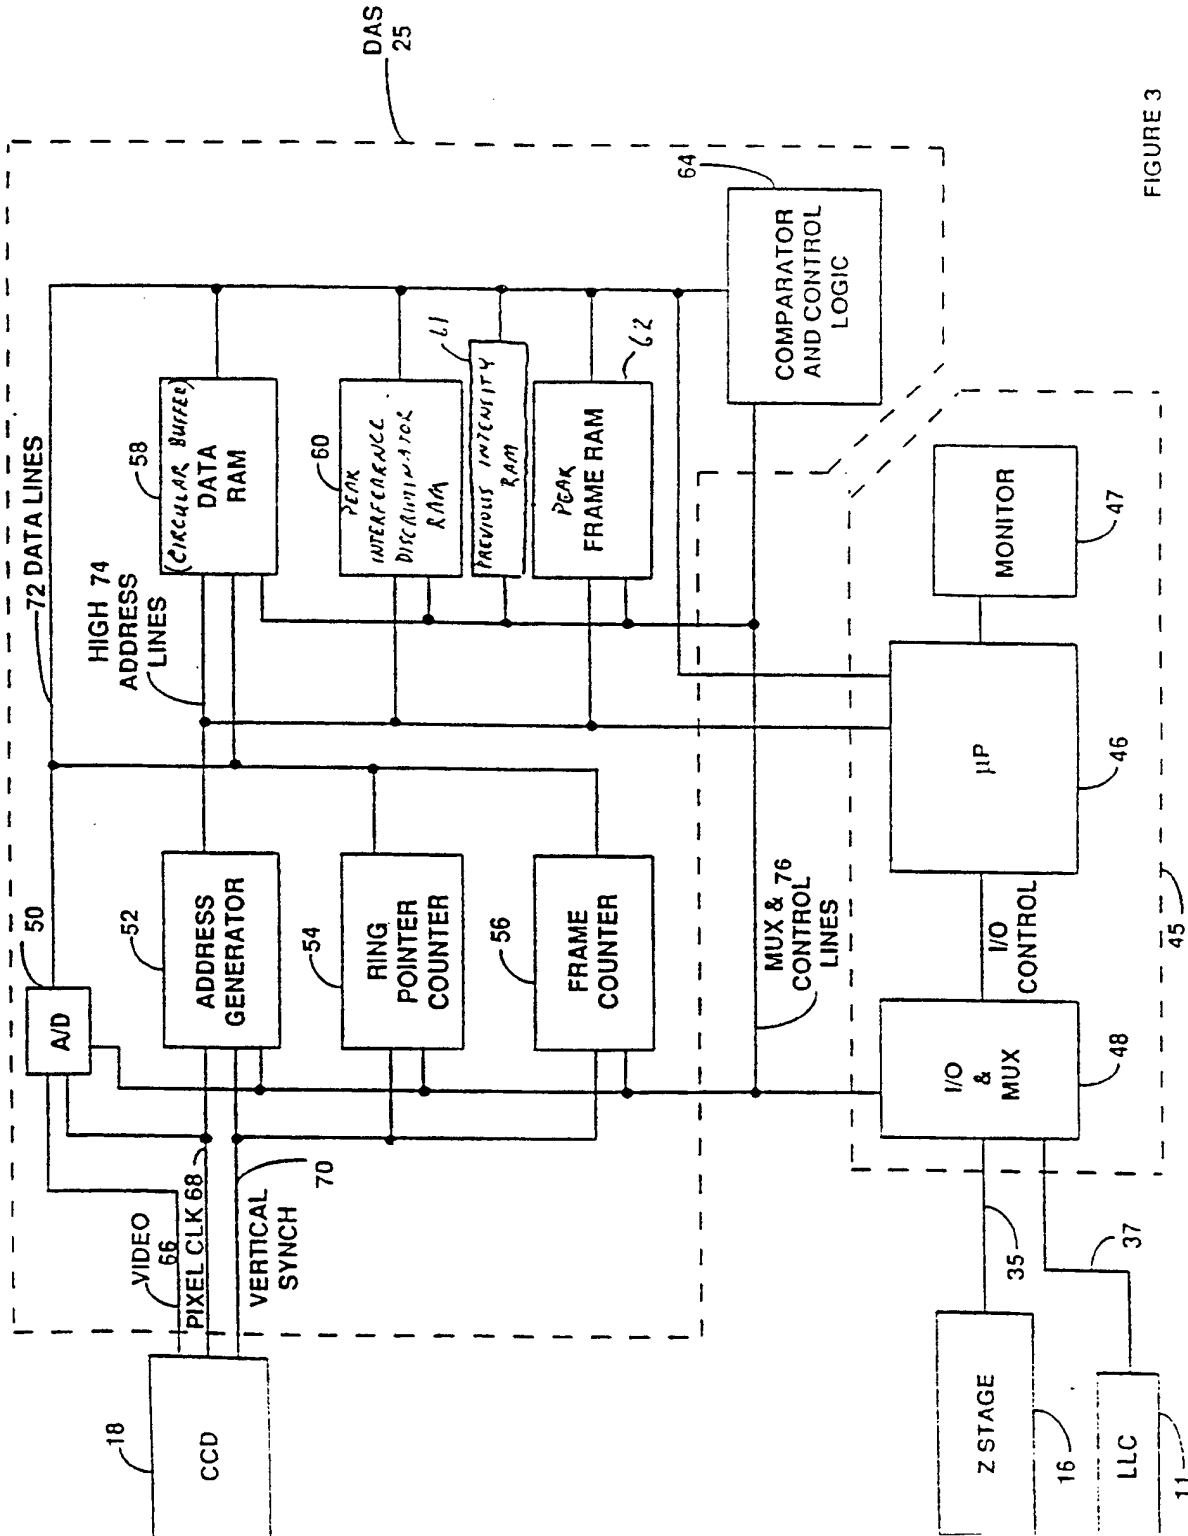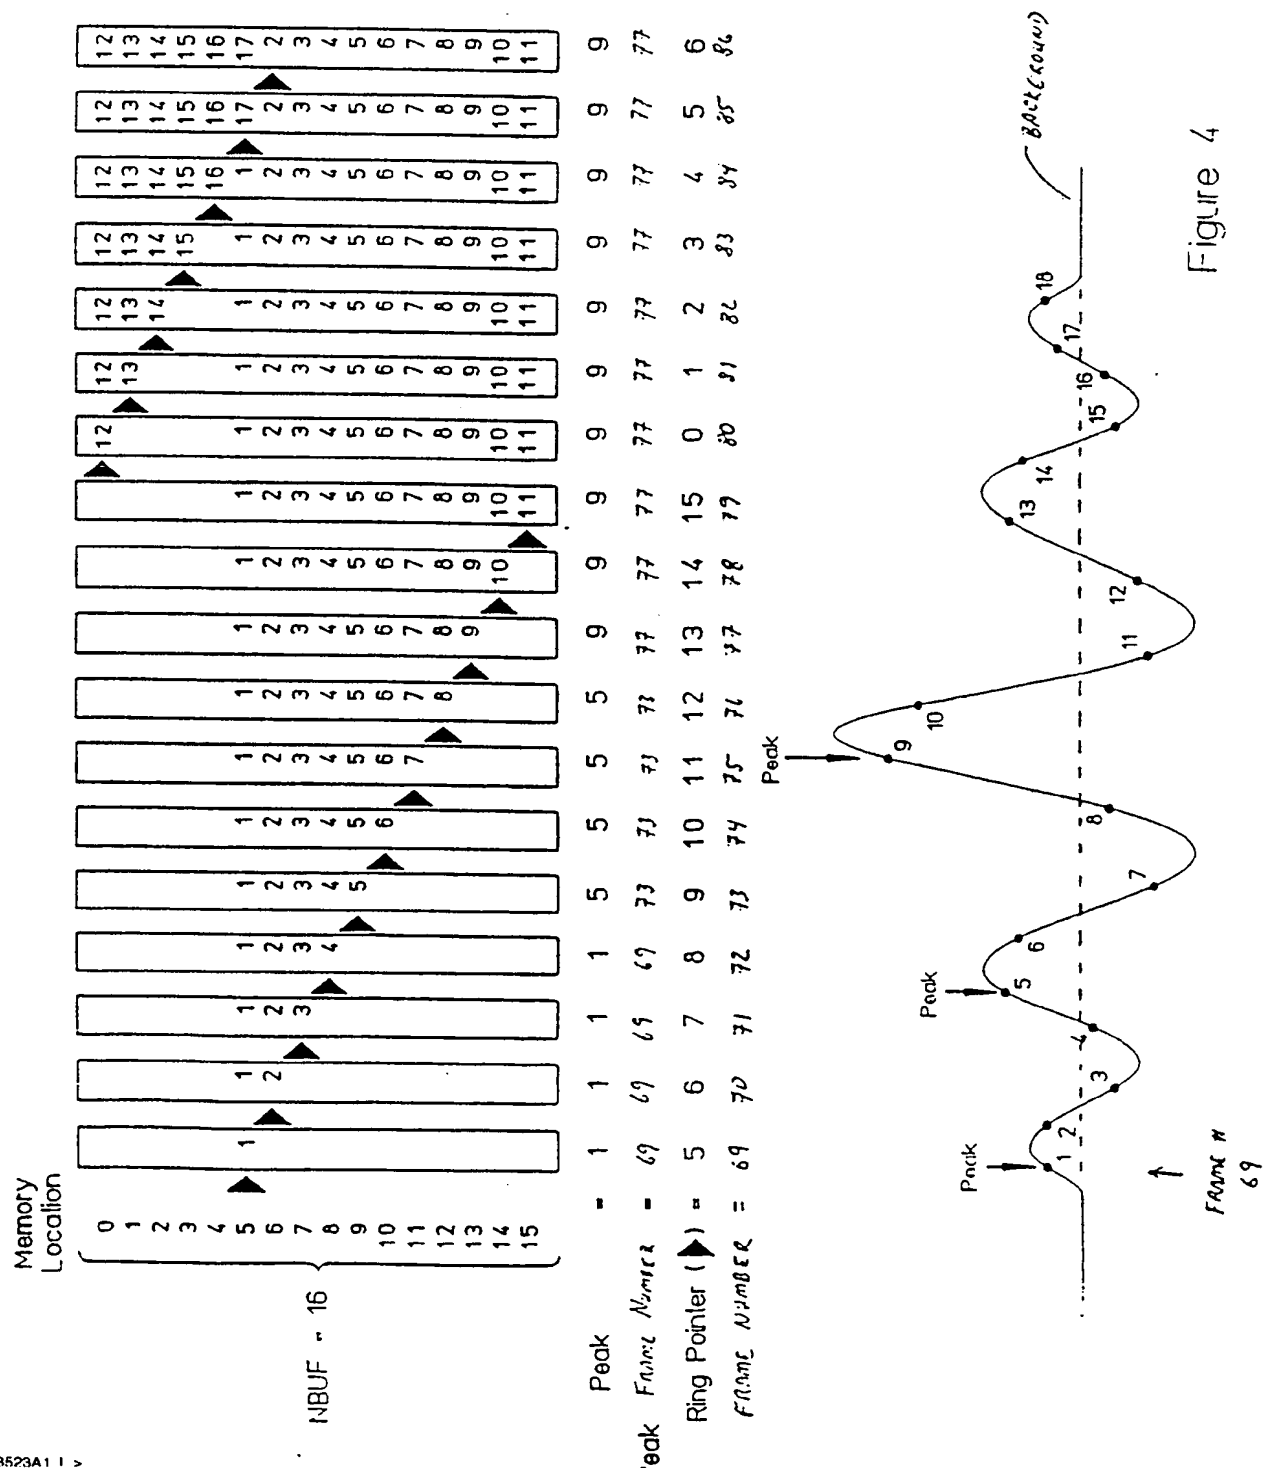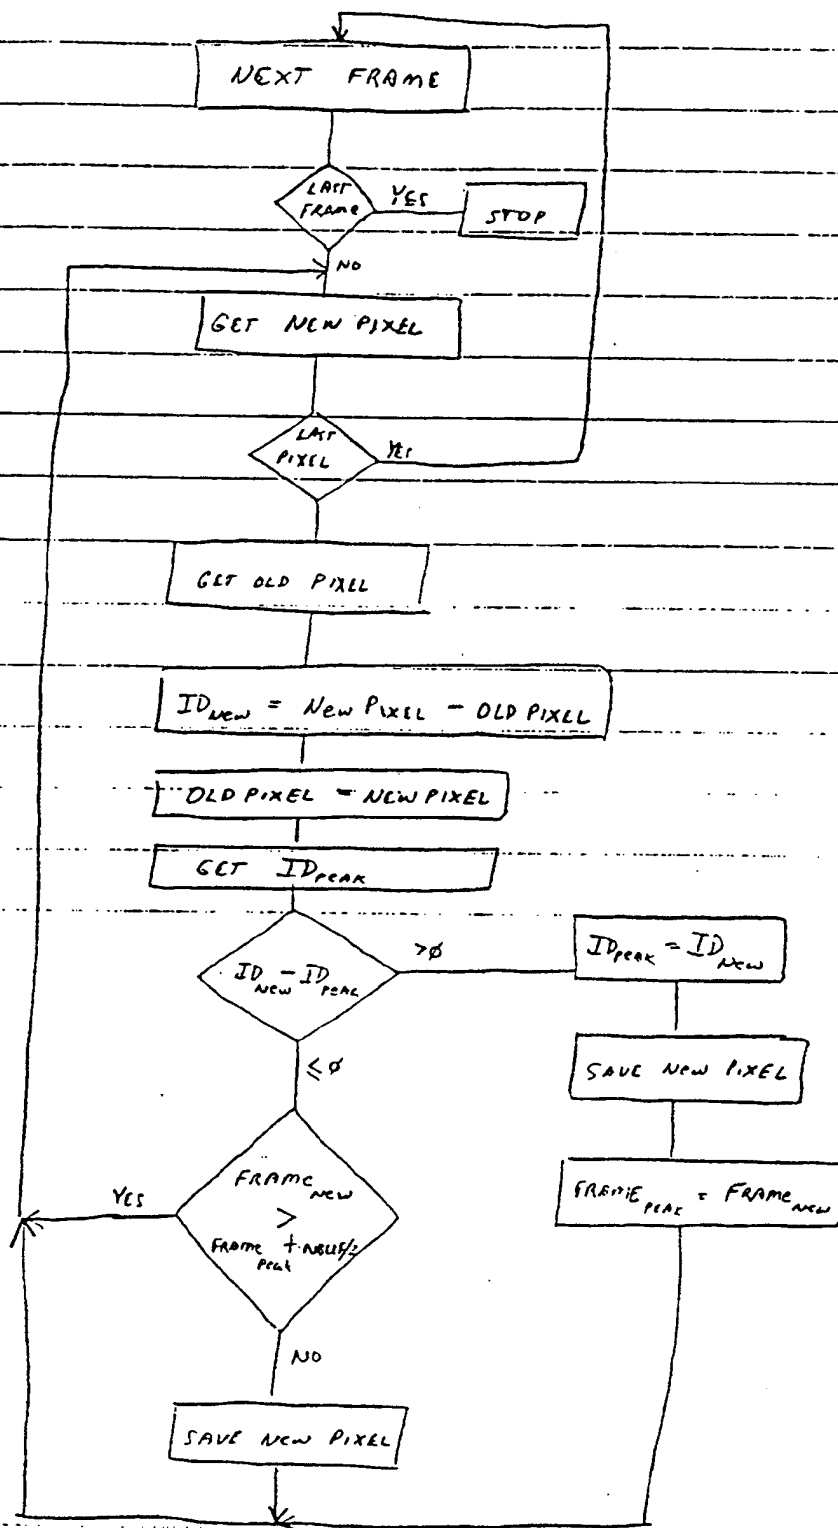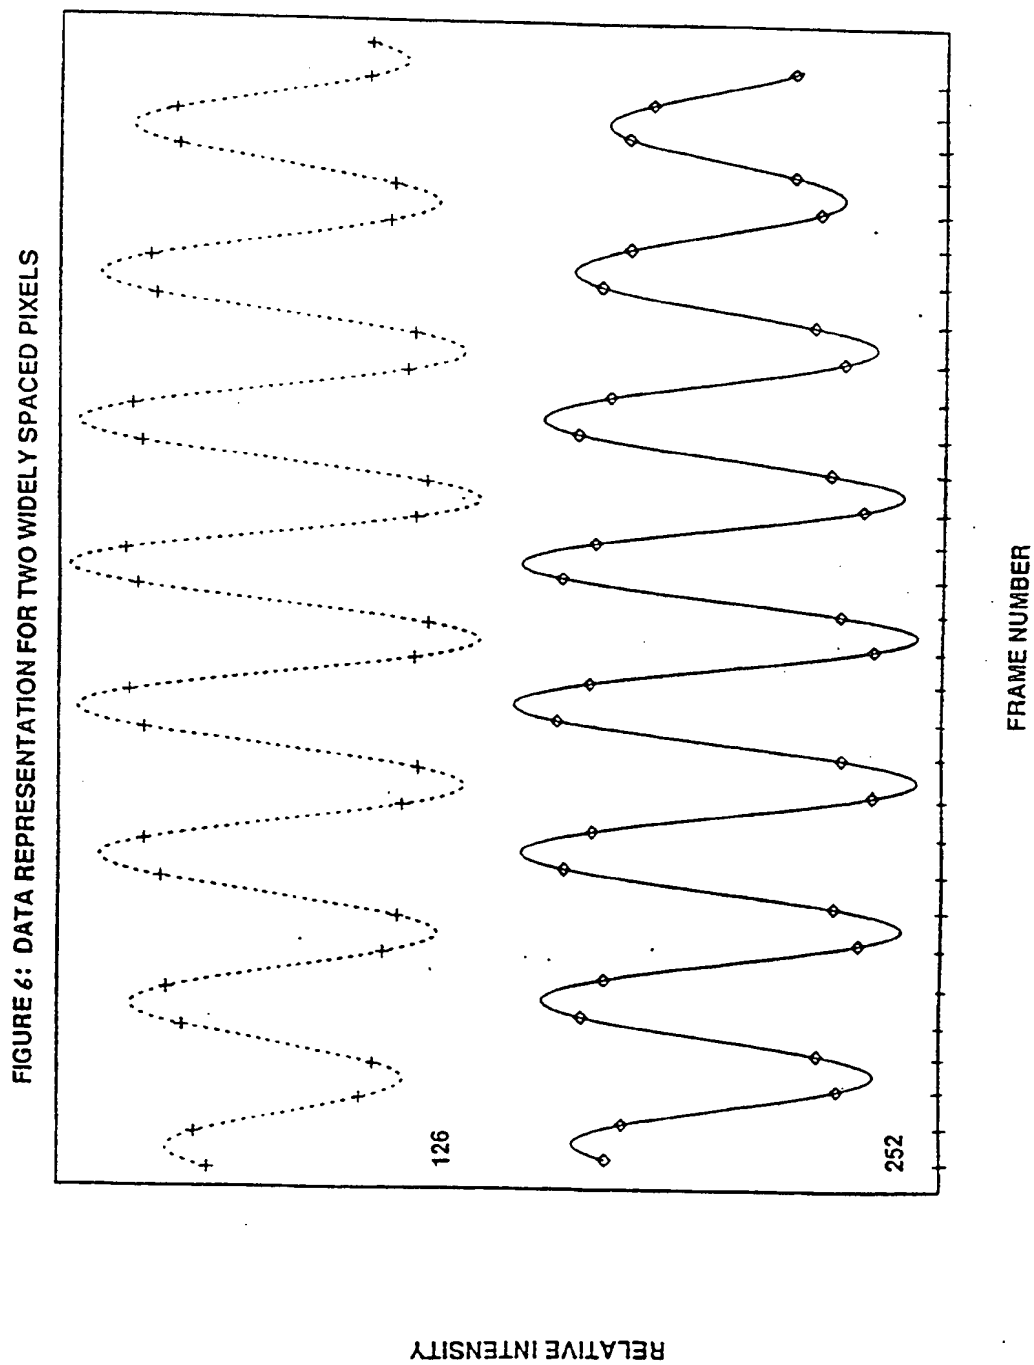FIGURE 3

Figure 4

FIGURE 5

FIGURE 6: DATA REPRESENTATION FOR TWO WIDELY SPACED PIXELS

126

252

FRAME NUMBER

RELATIVE INTENSITY

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :GO1B 11/02, 11/00
US CL :356/357,358,359,360
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 356/357,358,359,360

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A 5,061,071 (Fujita et al.) 29 October 1991 See entire document	1-35
A	US,A 4,869,593 (Biegen) 26 September 1989 See entire document	1-35
A	US,A 4,732,483 (Biegen) 22 March 1988 See entire document	1-35
A	US,A 4,978,219 (Bessho) 18 December 1990 See entire document	1-35
A	US,A 4,714,348 (Makosch) 22 December 1987 See entire document	1-35

[X] Further documents are listed in the continuation of Box C.   [ ] See patent family annex.

	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 MARCH 1994	MAR 2 4 1994

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer ROLF HILLE
Facsimile No. NOT APPLICABLE	Telephone No. (703) 308-4919

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A 5,068,541 (Kondo) 25 November 1991 See entire document	1-35
A,P	US,A 5,204,734 (Cohen et al.) 20 Apr. 1993 See entire document	1-35
A	JP,A 01-282,411 (Bessho) 14 November 1989 See entire document	1-35